


CERTIFICATION UNDER 37 CFR 1.10

JC10 Rec'd PCT/PTO 1 9 NOV 2001
09/979577

I hereby certify that this Transmittal Letter and the papers indicated as being transmitted therewith are being deposited with the United States Postal Service on this date shown below in an envelope as "Express Mail Post Office to Addressee" under the below indicated Mailing Label Number, addressed to: Box PCT, Assistant Commissioner for Patents, Washington, D.C. 20231.

Mailing Label No.: EF232847932US

Deposit Date: November 14, 2001


Name: Janet Farr

ATTORNEY'S DOCKET NO. YAMAP0794US

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
(DO/EO/US)**

In re national phase of:

Applicant(s): Naohiro Kimura, et al.
International Application No.: PCT/JP00/03430
International Filing Date: 26 May 2000
Priority Date Claimed: 27 May 1999
Title of Invention: INFORMATION REPRODUCTION APPARATUS,
INFORMATION CARRIER, AND INFORMATION
RECORDING APPARATUS

**TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED
OFFICE (DO/EO/US) CONCERNING ENTRY INTO U.S. NATIONAL
PHASE UNDER 35 U.S.C. 371**

Box PCT
Assistant Commissioner for Patents
Washington D.C. 20231

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information under 35 U.S.C. 371:

1. This express request to immediately begin national examination procedures (35 U.S.C. 371(f)).
2. The U.S. National Fee (35 U.S.C. 371(c)(1)) and other fees (37 CFR 1.492) as indicated below.

3. A copy of the International application (35 U.S.C. 371(c)(2)):
- a. ☐ is transmitted herewith
(International Publication No. _____).
 - b. ☐ is not required, as the application was filed with the United States Receiving Office.
 - c. ☒ has been transmitted by the International Bureau. A copy of Form PCT/IB/308 is enclosed.
4. ☒ A translation of the International application into the English language (35 U.S.C. 371(c)(2)) is transmitted herewith.
5. Amendments to the claims of the International application under PCT Article 19 (35 U.S.C. 371(c)(3)):
- a. ☐ are transmitted herewith.
 - b. ☐ have been transmitted by the International Bureau.
6. ☐ A translation of the amendments to the claims under PCT Article 19 (38 U.S.C. 371(c)(3)) is transmitted herewith.
7. A copy of the international examination report (PCT/IPEA/409)
- a. ☒ is transmitted herewith.
 - b. ☐ is not required as the United States Patent and Trademark Office was the IPEA.
8. Annex(es) to the international preliminary examination report
- a. ☐ is/are transmitted herewith.
 - b. ☐ is not required as the United States Patent and Trademark Office was the IPEA.
9. ☐ A translation of the annexes to the international preliminary examination report is transmitted herewith.
10. ☒ An oath or declaration of the inventor (35 U.S.C. 371(c)(4)) complying with 35 U.S.C. 115 is submitted herewith.

11. An International Search Report (PCT/ISA/210)
- a. ☒ is transmitted herewith.
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was searched by the United States International Searching Authority.
12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98 is transmitted herewith, along with Form PTO-1449 and copies of citations listed.
13. ☒ An assignment document is transmitted herewith for recording, along with a separate cover sheet.
14. ☐ A preliminary amendment is enclosed.
15. ☐ A verified statement claiming small entity status is enclosed.
16. ☐ Other:

09/979577

JC10 Rec'd PGT/PTO 1 9 NOV 2001

Transmittal Letter to United States Designated/Elected Office

Page 4

Basic National Fee					Fee
IPEA - US					\$710.00
ISA - US					\$740.00
PTO not ISA or IPEA					\$1,040.00
Claims meet PCT Art. 33(1)-(4) - IPEA - US					\$100.00
Filing with EPO or JPO search report					\$890.00
Enter appropriate basic fee →					\$890.00
Claims*	Number filed		Number extra	Rate	
Total claims	24	-20	4	\$18.00	\$72.00
Independent claims	4	-3	1	\$84.00	\$84.00
Multiple dependent claims (if applicable)				\$280.00	
Total of above					\$1,046.00
Small entity statement enclosed, 1 if Yes, 0 if No →				0	\$0.00
Total national fee					\$
Fee for recording enclosed assignment				\$40.00	\$40.00
Total fees enclosed					\$1,086.00

*After any attached preliminary amendment reducing the number of claims and/or deleting multiple dependencies.

☒ [X] A check in the amount of \$ 1,086.00 to cover the above fees is enclosed.

☐ [] Please charge our Deposit Account No. 18-0988 in the amount of \$_____. A duplicate copy of this sheet is enclosed.

WARNING: TO AVOID ABANDONMENT OF THE APPLICATION THE BASIC NATIONAL FEE MUST BE PAID WITHIN THE 20/30 MONTH TIME LIMIT.

TOP SECRET

16. The Commissioner is hereby authorized to charge the following additional fees that may be required by this paper and during the entire pendency of this application to our Deposit Account No. 18-0988:


a. ☒ 37 CFR 1.492(a)(1), (2), (3), (4) and (5) (filing fees)

WARNING: BECAUSE FAILURE TO PAY THE NATIONAL FEE WITHIN 30 MONTHS WITHOUT EXTENSION (37 CFR S 1.495(B)(2)) RESULTS IN ABANDONMENT OF THE APPLICATION, IT WOULD BE BEST TO ALWAYS CHECK THE ABOVE BOX.

b. ☐ 37 CFR 1.492(b), (c) and (d) (presentation of extra claims)

NOTE: Because additional fees for excess or multiple dependent claims not paid on filing or on later presentation must only be paid or these claims cancelled by amendment prior to the expiration of the time period set for response by the PTO in any notice of fee deficiency (37 CFR 1.492(d)), it might be best not to authorize the PTO to charge additional claim fees, except possibly when dealing with amendments after final action.

Respectfully submitted,



Neil A. DuChez
Reg. No. 26,725

Direct all correspondence and telephone calls to:

Neil A. DuChez, Esq.
RENNER, OTTO, BOISSELLE & SKLAR, LLP
1621 Euclid Avenue, 19th Floor
Cleveland, Ohio 44115
Tel: 216-621-1113 Fax: 216-621-6165

51PPTS

DESCRIPTION

INFORMATION REPRODUCTION APPARATUS, INFORMATION CARRIER,
AND INFORMATION RECORDING APPARATUS

5

TECHNICAL FIELD

10 The present invention relates to an information reproduction apparatus for reproducing information recorded on a disk-like information carrier, the disk-like information carrier, and an information recording apparatus for recording information on the information carrier.

BACKGROUND ART

15

20 CDs (Compact Disk) and DVDs (Digital Versatile Disk) have respective unified physical format standards in which information is recorded into prepits at a linear velocity of 1.3 m/s for CDs and at a linear velocity of 3.49 m/s for DVDs regardless of whether the information is audio/video information or code information.

25 For apparatuses (CD players and DVD players) for reproducing audio/video information thus recorded on a disk at a constant linear velocity, conventionally, access performance is not considered to be important, and CLV (Constant Linear Velocity) control is performed in order to secure a low level of noise and vibration. In CLV control, the number of revolutions of a spindle motor is controlled
30 in such a manner that a transfer rate (or linear velocity) is constant over a disk range from an inner circumference to an outer circumference of the disk. Such control is achieved as follow. The phase of the frequency of a

reproduction clock in a PLL (Phase-Locked Loop) control section of a signal processing circuit is synchronized with the phase of the frequency of a reference clock obtained by frequency-dividing a quartz oscillator, and the
5 frequency of the reproduction clock is controlled using the frequency of the frequency-divided reference clock, thereby generating a control signal for the spindle motor.

For apparatuses for reproducing a disk in which
10 computer code information is recorded (a CD-ROM [Read-Only Memory] drive and a DVD-ROM drive), jitter-free for controlling the reproduction clock frequency per se of the PLL of the signal processing circuit is introduced, and CAV (Constant Angular Velocity) control is performed to obtain
15 satisfactory fast-speed access performance. In CAV control, a spindle motor is controlled in such a manner that the number of revolutions is constant over a disk range from an inner circumference to an outer circumference of the disk.

20 Recently, hybrid disks which are CDs, DVDs, or the like in which audio or video information and computer code information are mixed have been produced. For such disks, conventionally, there is not a definition, a regulation, nor a proposal as to the order of pieces of information to
25 be recorded, and a disk site at which information about the size of a unit of information will be recorded on the disk. For example, a considerably large size of code information may be recorded after a considerably short-time of music. Conversely, a considerably small size of code information
30 may be recorded after a considerably long-time of music.

For such a disk, in the conventional art, audio/video information and code information are all

reproduced by either a CLV control method or a CAV control method. Specifically, all information on the disk is subjected to data processing for audio/video information using CLV control where a transfer rate is reduced all over
5 the disk. Alternatively, all information on the disk is subjected to data processing for code information (specifically, information, such as audio, is also temporarily stored in a cache memory or the like and thereafter transferred as memory information to the
10 outside) using CAV control where a transfer rate is increased toward the outer circumference of the disk.

In the case where all information on a disk is reproduced using CLV control, code information is
15 reproduced using CLV control even if code information is predominantly recorded on the disk. In such a case, even when code information is randomly accessed from an application on a host computer, the response time of a spindle motor predominantly occupies the access time,
20 resulting in a significant reduction in access speed. Further, the noise caused by driving the motor in the access causes problems.

In the case where all information on a disk is
25 reproduced using CAV control, random access seldom occurs since audio/video information is predominantly recorded. Although a host computer exhibits almost the same performance in outputting audio or displaying moving images if a transfer rate is greater than or equal to a predetermined
30 value, a spindle motor is rotated at a higher speed greater than or equal to a required value, so that rotation, or vibration due to mass eccentricity or the like causes noise.

For a kind of CD (CD-EX (Extra) or the like), a reproduction apparatus capable of switching between CLV and CAV control is available, in which music information is subjected to CLV control, while code information, such as data relating to lyrics or songs, or artist information, is subjected to CAV control. Such a reproduction apparatus distinguishes audio information from code information using disk information recorded in a lead-in area, a TOC (Table Of Contents) area, and the like, or a sub-code defined in a logical format. Based on this identification, CAV control and CLV control are switched.

In the above-described technique in which CLV control and the CAV control are switched, when a disk is sequentially read from an inner circumference toward an outer circumference, a switching operation between CLV control and CAV control occurs every time the type of information is changed, resulting in a reduction in an average reproduction rate. Further, noise or heat is generated in a spindle motor in the switching.

The present invention is provided to solve the above-described problems. The object of the present invention is to provide: an information reproduction apparatus which appropriately selects CLV or CAV control, depending on information to be reproduced; an information carrier having an information recording area for recording information suitable for reproduction using CLV/CAV control; and an information recording apparatus for recording information on the information carrier.

DISCLOSURE OF THE INVENTION

An information reproduction apparatus according to the present invention comprises a rotating section for rotating a disk-like information carrier on which a unit of continuous information capable of being continuously read out is recorded, a CLV control section for controlling the rotating section in such a manner that the information carrier is rotated at a constant linear velocity, a CAV control section for controlling the rotating section in such a manner that the information carrier is rotated at a constant angular velocity, a rotation control selection section for selectively operating the CLV control section or the CAV control section, and an information determination section for detecting an information length of the continuous information. The rotation control selection section is constructed in such a manner as to selectively operate the CLV control section or the CAV control section based on a result of the detection of the information length of the continuous information by the information determination section. Therefore, the above-described object can be achieved.

In one embodiment of this invention, when first information having the information length as detected by the information determination section larger than a predetermined size is reproduced, the CLV control section is operated, and when second information having the information length as detected by the information determination section smaller than the predetermined size is reproduced, the CAV control section is operated.

In one embodiment of this invention, when first

information having the information length as detected by the information determination section larger than a predetermined size is reproduced, the CAV control section is controlled in such a manner that the information carrier is rotated at as low a number of revolutions as a level where a transfer rate required to reproduce information recorded in a most inner circumstance of the disk-like information carrier can be secured, and when second information having the information length as detected by the information determination section smaller than the predetermined size is reproduced, the CAV control section is operated.

In one embodiment of this invention, the continuous information includes a header portion recording a block size or a file size, and a data portion, and the information determination section is constructed in such a manner as to detect the information length based on a content of the header portion.

In one embodiment of this invention, the information carrier has a first information recording area at an inner circumference side and a second information recording area at an outer circumference side both arranged in a radial direction, and the first information is recorded in the first information recording area and the second information is recorded in the second information recording area.

Another information reproduction apparatus according to the present invention comprises a rotating section for rotating a disk-like information carrier on which moving image information is recorded, a CLV control section for controlling the rotating section in such a manner that the information carrier is rotated at a constant linear

velocity, a CAV control section for controlling the rotating section in such a manner that the information carrier is rotated at a constant angular velocity, a rotation control selection section for selectively operating the CLV control section or the CAV control section, a reproduced signal processing section for reading out the moving image information from the information carrier and processing the moving image information, and an information determination section for determining whether or not a type of information to be reproduced is moving image information. The rotation control selection section is constructed in such a manner as to selectively operate the CLV control section or the CAV control section based on a result of the determination by the information determination section of whether or not information to be reproduced is moving image information. Therefore, the above-described objective can be achieved.

In one embodiment of this invention, when the information determination section determines that the type of information to be reproduced is moving image information, the CLV control section is operated.

In one embodiment of this invention, when the information determination section determines that the type of information to be reproduced is moving image information, the CAV control section is controlled in such a manner that the information carrier is rotated at as low a number of revolutions as a level where a transfer rate required to reproduce information recorded in a most inner circumstance can be secured.

In one embodiment of this invention, the information determination section is constructed in such a manner that

when it is detected that an information length of information to be reproduced is greater than or equal to about 1 GB, the information determination section determines that the information to be reproduced is moving image information.

5

In one embodiment of this invention, the information determination section is constructed in such a manner that when a command specialized in reading of moving image information is input, the information determination section determines that the information to be reproduced is moving image information.

10

In one embodiment of this invention, the information determination section is constructed in such a manner that when it is verified that a regional code is recorded in the information carrier, the information determination section determines that the information to be reproduced is moving image information.

15

In one embodiment of this invention, the information determination section is constructed in such a manner that when it is verified that defect management information is not registered in the information carrier, the information determination section determines that the information to be reproduced is moving image information.

20

25

In one embodiment of this invention, the information determination section is constructed in such a manner that when it is verified that an extension of information to be reproduced indicates a MPEG or VOB file, the information determination section determines that the information to be reproduced is moving image information.

30

5 In one embodiment of this invention, the information determination section is constructed in such a manner that when it is verified that information to be reproduced is restrained under a parental lock, the information determination section determines that the information to be reproduced is moving image information.

10 The information determination section is constructed in such a manner that when it is verified that authentication has been conducted so as to protect copyright, the information determination section determines that the information to be reproduced is moving image information.

15 The information reproduction apparatus further comprises a focusing section for focusing a light beam to the information carrier; a focusing control section for controlling the light beam focused by the focusing section into a predetermined focus state; a tracking control section for controlling the light beam focused by the focusing
20 section in such a manner that the light beam correctly scans a track on the information carrier, and a reproduced signal processing section for reproducing a signal read out from the information carrier.

25 An information carrier according to the present invention is a disk-like information carrier having a plurality of information recording areas. The plurality of information recording areas are separated along a radial direction of the information carrier, and information is
30 recorded in each of the plurality of information recording area depending on the information length of a unit of continuous information capable of being continuously read out.

5 Preferably, information having an information length of continuous information larger than a predetermined size is recorded in the information recording area at an inner circumference side of the information carrier, and information having an information length of continuous information smaller than the predetermined size is recorded in the information recording area at an outer circumference side of the information carrier.

10

15 More preferably, a specific area for recording the number of the plurality of information recording areas, positional information of each information recording area, and a minimum size of continuous information recorded in each information recording area is further provided.

20 An information recording apparatus according to the present invention comprises a recording section for recording information including a unit of continuous information capable of being continuously recorded into a disk-like information carrier having a plurality of information recording areas separated along a radial direction of the information carrier. The information recording apparatus further includes an information
25 determination section for detecting an information length of the continuous information, and the recording section is constructed in such a manner that the continuous information is recorded into the corresponding information recording area depending on the information length detected
30 by the information determination section. Therefore, the above-described object can be achieved.

Preferably, the recording section is controlled by

the information determination section in such a manner that information having an information length of continuous information larger than a predetermined size is recorded in the information recording area at an inner circumference side of the information carrier, and information having an information length of continuous information smaller than the predetermined size is recorded in the information recording area at an outer circumference side of the information carrier.

More preferably, the recording section is constructed in such a manner that the number of the plurality of information recording areas, positional information of each information recording area, and a minimum size of continuous information recorded in each information recording area are recorded in a specific area of the information carrier.

The information recording apparatus further comprises a rotating section for rotating the information carrier at a predetermined number of revolutions, a focusing section for bringing and focusing a light beam to the information carrier, a focusing control section for controlling the light beam focused by the focusing section into a predetermined focus state, and a tracking control section for controlling the light beam in such a manner that the light beam correctly scans a track on the information carrier.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram showing a configuration of an information reproduction apparatus according to

Embodiments 1 and 2 of the present invention.

Figure 2 is a block diagram showing a detailed configuration of a spindle control circuit in the information reproduction apparatus of Figure 1.

Figure 3 is a schematic diagram showing a logical format of information to be reproduced by the information reproduction apparatus of Embodiment 1.

Figure 4 is a schematic plan view showing a configuration of an information carrier according to Embodiment 3 of the present invention.

Figure 5 is a schematic diagram showing a logical format of a most inner circumference information portion of the information carrier of Figure 4.

Figure 6 is a characteristic graph showing relationships between a radial position, and the number of revolutions and a transfer rate, of an information carrier of a first example of Embodiment 3.

Figure 7 is a characteristic graph showing relationships between a radial position, and the number of revolutions and a transfer rate, of an information carrier of a second example of Embodiment 3.

Figure 8 is a block diagram showing a configuration of an information recording apparatus according to Embodiment 4 of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

First, fundamental characteristic features of the present invention will be described.

5

An information reproduction apparatus according to the present invention determines the information length or information type (whether or not the information is a moving image) of continuous information and, based on a result of the determination, performs reproduction using CAV control or CLV control. As used herein, the term "continuous information" refers to a unit of information which can be continuously read from an optical disk.

10

15

20

25

The information length of continuous information is determined by detecting data relating to the information length of the information recored in each header. When the information length is greater than a predetermined size, CLV control, or CAV control in which the number of revolutions is limited, is performed. When the information length is less than the predetermined size, CAV control is performed. The information type, i.e., whether or not the information is a moving image, is estimated based on data relating to copyright protection, a regional code, code information for limiting reproduction, or the like.

30

An information carrier (optical disk) according to the present invention is a disk-like information carrier on which a plurality of information recording areas are provided for recording information, depending on the information length of continuous information. These information recording areas are separated along a radial direction of the information carrier. In the information

carrier of the present invention, preferably, information having the information length of continuous information greater than a predetermined size is recorded in an information recording area provided at the inner circumference side of the information carrier, while information having the information length of continuous information less than the predetermined size is recorded in an information recording area provided at the outer circumference side of the information carrier.

10

Further, in the information recording apparatus of the present invention, a recording section is provided for recording information into a corresponding information recording area of the information carrier based on the information length of continuous information which is a unit of information capable of being continuously read from an optical disk. Preferably, information having the information length of continuous information greater than a predetermined size is recorded in an information recording area provided at the inner circumference side of the information carrier, while information having the information length of continuous information less than the predetermined size is recorded in an information recording area provided at the outer circumference side of the information carrier.

25

According to the present invention, rotational driving control (CLV or CAV control) optimal to information is performed in reproducing information, thereby reducing noise in reproducing music or video information. Further, an average access time and an average reproduction time for the entire information carrier can be reduced.

30

Hereinafter, embodiments of the present invention will be described with reference to the accompanying drawings.

5 (Embodiment 1)

An information reproduction apparatus and its reproduction method according to Embodiment 1 of the present invention will be described. Figure 1 schematically shows a configuration of the information reproduction apparatus of Embodiment 1.

Information recorded on a disk 1 is read out by an optical pickup 3. More specifically, the optical pickup 3 correctly focuses a light beam to a pit or a mark recorded on a track of the disk 1 by employing a focusing section provided therein, and reads a signal based on the intensity of reflected light. The light beam is shifted to a desired track on the disk 1 by a traverse motor 4 which moves the optical pickup 3 in a radial direction of the disk 1.

The light beam is brought into focus on a disk, and is used to correctly scan a pit sequence (track), by a control circuit 8 which functions as follows. A focusing error signal and a tracking error signal input from the optical pickup 3 are subjected to low range compensation, phase compensation, and the like in the control circuit 8, and the compensated signal is fed back via a focus driving circuit 5 and a tracking drive circuit 6 to a focusing actuator and a tracking actuator provided in the optical pickup 3. Therefore, focusing servo control is performed in such a manner as to bring a light beam to focus on a disk, and, tracking servo control is performed in such a manner as to correctly scan a pit sequence (track).

5 The optical pickup 3 creates an RF (Radio Frequency) signal. The RF signal is converted to a binary signal by a data slicer 11. The binary signal is input to a PLL (Phase-Locked Loop) circuit 12. The PLL circuit 12 generates a reproduction clock frequency based on the binary signal and synchronously extracts a signal on the disk.

10 Rotation of the disk 1 is controlled by a spindle motor 2 (rotating section). In the present invention, such control of rotation is CLV control and CAV control. A control signal required for the spindle motor 2 to achieve CLV control or CAV control is generated by a spindle control circuit 9 (a CLV control section and a CAV control section).
15 The spindle control circuit 9 generates a control signal for the spindle motor 2 from the reproduction clock frequency in the case of CLV control, and generates a control signal for the spindle motor 2 from an FG (Frequency Generator) signal obtained by a rotation detector of the
20 spindle motor 2 in the case of CAV control. With these control signals, the rotation of the spindle motor 2 is controlled via a spindle drive circuit 10.

25 Hereinafter, the CAV control and the CLV control of the spindle motor 2 and the switching therebetween will be described with reference to Figures 1 and 2. Figure 2 is a block diagram showing a detailed internal configuration of the spindle control circuit 9 of Figure 1.

30 First, the CLV control will be described. As described above, a binary signal output from the data slicer 11 is input to the PLL circuit 12. A reproduction clock frequency generated by the PLL circuit 12 is input

to the spindle control circuit 9. The reproduction clock frequency input to the spindle control circuit 9 is converted by an S-P converter 102 from frequency information to phase information. Further, a subtracter 106 is used in calculating a phase error between the reproduction clock frequency and a reference clock frequency obtained by frequency division of a quartz oscillator. The resultant phase error is multiplied by a predetermined gain by a multiplier 104 and the result is input to an adder 107. By performing phase control in this manner, the variation rate of rotation with respect to load torque in a control region is theoretically zero, thereby making it possible to control the rotation of the spindle motor 2 within a jitter margin.

However, the sole use of the phase control causes the drive control system to be a second order system and therefore unstable. Therefore, as described below, frequency control is performed so as to produce a velocity control term which is in turn added to a phase control term, thereby stabilizing the drive control system. Specifically, the reproduction clock frequency is frequency-divided by a frequency divider 101 by a factor of N (where N is a natural number), and a frequency error between the divided clock frequency and the reference clock frequency is calculated via a subtracter 105, and multiplied by a predetermined gain by the multiplier 103, and the result is input to the adder 107. Thus, the velocity control term is added to the phase control term. A control signal EC to which a frequency error and a phase error are added is output via a switch 114 for switching CAV/CLV control to a spindle drive circuit 10. In this manner, CLV rotation control is achieved.

Next, the CAV control will be described. Similar to as described above, an FG signal generated by the rotation detector of the spindle motor 2 is input to the control circuit 8, and is then frequency-divided by a predetermined factor, and the result is input to the spindle control circuit 9. The input FG signal is converted by an S-P converter 109 from frequency information to phase information. A phase error between the converted FG signal and a reference FG signal corresponding to the constant number of revolutions generated by the control circuit 8 is calculated via a subtracter 112, and is multiplied by a predetermined gain by a multiplier 110, and the result is input to an adder 113. By performing phase control in this manner, the variation rate of rotation with respect to load torque in a control region is theoretically zero, thereby making it possible to control the rotation of the spindle motor within a jitter margin.

However, the sole use of the phase control causes the drive control system to be a second order system and therefore unstable. Therefore, a frequency error between the divided FG signal and the reference FG signal is calculated via a subtracter 111, and is multiplied by a predetermined gain by a multiplier 108, and the result is input to the adder 113 so as to perform frequency control to produce a velocity control term which is in turn added to the phase control term, thereby achieving stabilization. A control signal EC to which a frequency error and a phase error are added is output via the switch 114 for switching CAV/CLV control to a spindle drive circuit 10. In this manner, CAV rotation control is achieved.

Next, the switching between CAV control and CLV control will be described with reference to Figure 3 as well as Figures 1 and 2.

5 Figure 3 schematically shows an exemplary format of
one piece of continuous information 30. To make it easier
to switch between CAV control and CLV control, the
information 30 includes divided portions, i.e., a header
10 portion 37 and a data portion 38. Further, the header
portion 37 includes the following information: SYNC 31 for
frame synchronization; ADRS 32 indicating the address of
the recorded information; SIZE 33 indicating the size of
the information (block size or file size); CONTENTS 34
15 indicating the type of the information; and GAP 35
indicating a boundary between the header portion 37 and the
data portion 38. A reproduced signal extracted by
synchronizing with the generated reproduction clock
frequency in the PLL circuit 12 is subjected to error
correction and demodulation by a demodulation circuit 13
20 (see Figure 1). The size of the information to be
reproduced (information length) is determined and processed
by a system controller 14 based on information in the
header portion 37 detected by the demodulation circuit 13.

25 When a piece of continuous information to be
reproduced has a size greater than a predetermined size,
the system controller 14 transmits a control signal to the
switch 114 to switch to a side L, i.e., for CLV control.
When a piece of continuous information to be reproduced has
30 a size smaller than the predetermined size, the system
controller 14 transmits a control signal to the switch 114
to switch to a side A, i.e., for CAV control. The
above-described predetermined size is the lower limit of

the information length range of continuous information which is judged to be suitable for reproduction using CLV control or the upper limit of the information length range of continuous information which is judged to be suitable for reproduction using CAV control, depending on the purposes of the use of the information and considering reproduction performance, access performance, vibration noise of a spindle motor, and the like. The same is applied to the following Embodiments 3 and 4 of the present invention.

In the present invention, the system controller 14 functions as an information determination section for detecting the information length of continuous information, and a rotation control selection section for selectively operating a CLV control section or a CAV control section. A signal which has been subjected to error correction and demodulation by the demodulation circuit 13 is reproduced by a host PC 15 (reproduction signal processing section) with a well-known method.

In this manner, reproduction by CAV control and reproduction by CLV control are switched, depending on the continuity (information length) of information to be recorded, thereby efficiently reproducing information on a disk. Information is recorded to an appropriate place of the optical disk, depending on its size, so that information can be efficiently reproduced using CLV/CAV control. Specifically, for example, audio or video data having a large information length to be continuously reproduced is generally recorded at the inner circumference side of a disk, while code information having a small information length to be continuously reproduced is generally recorded at the

outer circumference side of the disk (this is described in detail later in Embodiment 3). Specifically, CLV control holding a required reproduction velocity is performed for audio or video data, while CAV control is performed for code information so that fast-speed random access is achieved.

In the above description, continuous information having an information length greater than a predetermined size is reproduced using CLV control. The present invention is not limited to this. Instead of CLV control, CAV control in which the number of revolutions is limited to a constant range may be used to reproduce continuous information having a large information length. A constant range of the number of revolutions refers to the number of revolutions which is as low as that in which a transfer rate (reproduction rate) required for reproduction of information recorded in the most inner circumference of a disk can be secured, for example. This constant range is preferably about 1.5 to 3 times as large as the number of revolutions of a disk corresponding to a minimum transfer rate required for reproduction of information recorded in the most inner circumference of the disk, taking into consideration a balance among the margin of the transfer rate, vibration of a rotating section, and the like. For example, about 1.5 times may be for a reproduction apparatus having large vibration. About 3 times may be for a reproduction apparatus having small vibration. With CAV control having the low number of revolutions, a required reproduction rate can be secured for continuous information having a large size.

Further, the present invention can be used no matter as to whether two kinds of information requiring different

rotational driving control methods, i.e., continuous information having an information length larger than a predetermined size and continuous information having an information length less than the predetermined size, are
5 stored on the same disk or different disks.

(Embodiment 2)

Hereinafter, an information reproduction apparatus and its reproduction method according to another
10 embodiment of the present invention will be described.

In Embodiment 1, the switching between CLV control and CAV control is performed based on the size of continuous information. In Embodiment 2, the switching is performed
15 based on the type of information (audio/video information or code information). Particularly, whether or not information is moving image information is determined before reproduction of moving image information. Based on the result, an optimal reproduction rate is provided so that
20 appropriate rotation control can be performed. Whether or not information to be reproduced is moving image information is determined with high probability by recognizing additional information and contents relating to functions recorded in a disk other than the moving image information.

25 A configuration of the information reproduction apparatus of Embodiment 2 is basically similar to that shown in Figures 1 and 2 relating to Embodiment 1. Therefore, a description thereof is here omitted. Hereinafter, a
30 fundamental operation of the switching between CLV/CAV control will be briefly described.

The system controller 14 (Figure 1) transmits a

control signal to the switch 114 in the spindle control circuit 9 to switch to a side L, i.e., for CLV control, when information to be reproduced is moving image information. Alternatively, the system controller 14 transmits a control
5 signal to the switch 114 in the spindle control circuit 9 to switch to a side A, i.e., for CAV control. In this case, in the CAV control, the number of revolutions is limited to a low level where a transfer rate required for reproduction of information recorded in the most inner
10 circumference of a disk can be secured. In other words, the number of revolutions is limited to a velocity which causes substantially no problem in processing for sound reproduction. This low-level range is preferably about 1.5 to 3 times as large as the number of revolutions of a disk
15 corresponding to a minimum transfer rate required for reproduction of information recorded in the most inner circumference of the disk, taking into consideration a balance among the margin of the transfer rate, vibration of a rotating section, and the like. For example, about 1.5
20 times may be for a reproduction apparatus having large vibration. About 3 times may be for a reproduction apparatus having small vibration.

As described above, if it is verified that
25 information to be reproduced is moving image information, a mode for securing a maximum transfer rate (CAV control) is switched to a mode for securing a transfer rate required for reproduction of moving images (CLV control, or CAV control in which the above-described number of revolutions
30 is limited). Therefore, vibration of a mechanism or a disk, or rotation noise or wind noise of a motor can be reduced as much as possible.

Hereinafter, a description will be given of a method for determining whether information to be reproduced is moving image information or information other than a moving image.

5

[Identification of Moving Image Information based on Information Length]

The system controller 14 determines that information to be reproduced is moving image information, when the information length of continuous information to be reproduced is greater than or equal to about 1 GB.

10
15
20
25
30

A file size indicating whether or not the information length is greater than or equal to 1 GB is recorded as information in a management area at a predetermined position on the disk 1. When an apparatus is activated, the management area is read out, and the file size is stored in RAM (Random Access Memory) in the system controller 14 along with a title, a volume name, and a recording position address on the disk 1. When this information is actually reproduced, whether or not the file size is greater than or equal to 1 GB is determined based on the management information stored on the RAM. When the file size is greater than or equal to 1 GB, the information is presumed to be moving image information, and rotational driving control is performed based on the above-described configuration and sequence. Specifically, CLV control, or CAV control in which the number of revolutions is limited, is performed. This method for identifying moving image information can be applied to both a ROM disk and a RAM disk.

[Identification of Moving Image Information using a Specialized Command for Moving Image Information]

The system controller 14 determines that information to be reproduced is moving image information, when an AV read command which is a moving image information read only command is transmitted from a host PC 15.

5

When it is determined that information to be reproduced is moving image information, the rotation control of the spindle motor 2 is switched in execution of the AV read comand as described above. Since it is not necessary to additionally issue a control command from the host PC 15 to reduce the number of revolutions, the overhead of communication with the host PC 15 can be reduced. This method for identifying moving image information can be applied to both a ROM disk and a RAM disk.

10
15

[Identification of Moving Image Information baed on Regional Code]

The system controller 14 typically attempts to obtain a regional code stored in the disk 1 during spin-up. Regional codes are grouped into 6 regions shown in Table 1 below, so that regions in which information can be reproduced are limited. When the regional code is recorded, it is determined that information to be reproduced is moving image information, and the rotation control of the spindle motor 2 is switched as described above during or immediately after spin-up. This method for identifying moving image information can be applied to a ROM disk.

20
25
30

(Table 1)

1: U.S., Canada, U.S. Territories
2: Japan, Europe, South Africa, Middle East (including Egypt)
3: Southeast Asia, East Asia (including Hong Kong)

4: Australia, New Zealand, Pacific Islands, Central America, Mexico, South America, Caribbean
5: Eastern Europe (Former Soviet Union), Indian Subcontinent, Africa (also North Korea, Mongolia)
6: China

[Identification of Moving image Information based on Defect Management Information]

5 In the case of a recordable disk, defect management information used to manage a defective sector is registered in a DMA (Defect Management Area) on the disk 1 in order to prevent false recording or recording failure to a defective sector so as to secure reliability. When a defective sector is present, a recording destination is changed from the defective sector to an alternate sector in which recording is performed. In the case of moving image information requiring the temporal connectivity (continuity) of a file, the change of a recording destination leads to system failure. Therefore, even if false recording or recoding failure occurs to some extent, recording is just continued so that exchanging is not performed. Such a method has been proposed.

20 For a disk adopting this proposal, the system controller 14 obtains defect management information from a DMA when the apparatus is activated, thereby determining that information to be reproduced is moving image information when there is no registered defect management information. Based on the determination, the rotation control of the spindle motor 2 is switched as described above. This method for identifying moving image information can be applied to a RAM disk.

[Identification of Moving Image Information based

on the Contents of the Head Portion of Information]

The type of information (audio information, video information, or code information) recorded in the CONTENTS 34 (see Figure 3) in the header portion 37 of information is detected by the system controller 14, so that it can be determined whether or not information to be reproduced is moving image information. Based on the determination, the rotation control of the spindle motor 2 is switched as described above. This method of identifying moving image information can be applied to both a ROM disk and a RAM disk.

[Identification of Moving Image Information based on Recorded Contents regarding to the Type of File]

The type of file is previously recorded as information in a management area at a predetermined position on the disk 1. When an apparatus is activated, the management area is read out, and the file size is stored in RAM in the system controller 14 along with a title, a volume name, and a recording position address written on the disk 1. When this information is actually reproduced, information to be reproduced is estimated to be moving image information if it is determined by the system controller 14 based on the management information stored in the RAM that the extension of reproduced information is MPEG (Motion Picture Expert Group) or VOB (Video Object). Similar to the above-described configuration and sequence, based on the determination, the rotation control of the spindle motor 2 is switched. This method of identifying moving image information can be applied to both a ROM disk and a RAM disk.

[Identification of Moving Image Information based on Code Information for Limiting Reproduction]

When information to be reproduced is restrained under a parental lock in order to limit reproduction of contents including violence, sexual scenes or the like, or when information to be reproduced includes information having a screen size of 16:9 letter box peculiar to movies, the information to be reproduced can be estimated to be moving image information by the system controller 14. Based on the determination, the rotation control of the spindle motor 2 is switched as described above. This method of identifying moving image information can be applied to a ROM disk.

[Identification of Moving Image Information based on BCA]

In the case of a ROM disk which is a reproduction only disk, it is difficult to provide a management area in disk stamping and store a flag indicating a moving image or a moving image file size in terms of capacity and compatibility. Taking this into consideration, the information that recorded information is moving image information is recorded in a BCA (Burst Cutting Area) in a most inner circumference of a disk. By reading the BCA at a required timing, whether or not information to be reproduced is moving image information is determined by the system controller 14. Based on the result of the determination, the rotation control of the spindle motor 2 is switched as described above. This method of identifying moving image information can be applied to both a ROM disk and a RAM disk.

[Identification of Moving Image Information based on Authentication of Information]

Moving image information to be reproduced often has

copyright. Therefore, when information is authenticated, it is estimated by the system controller 14 that information to be reproduced is moving image information. Based on this estimation, the rotation control of the spindle motor 2 is
5 switched as described above. This method of identifying moving image information can be applied to both a ROM disk and a RAM disk.

The above description relates to the case where the
10 information reproduction apparatus per se identifies moving image information and the rotational driving control of a disk is switched. Other than such identification/switching methods, the user may identify the type of information by noting the title of information to determine whether or not
15 the information is a moving image for appreciation, whether or not the information is code information for installing, or the like (i.e., the purpose of use). Therefore, a moving image switch may be attached to the information reproduction apparatus, and the user may turn the switch ON in the case
20 of moving image information. In this case, CLV control for a moving image, or CAV control in which a transfer rate is secured for reproduction of a moving image at the most inner circumference, can be easily selected.

As described above, to estimate whether or not
25 information is a moving image, necessary information can be obtained by reading a management area or the like, which includes additional information or functions, instead of moving image information to be reproduced. Further, a
30 switch is provided in order for the user to have an opportunity to select type of information, such that moving image information can be identified with a higher probability. Thus, the type of information is identified and an

appropriate rotational driving control is performed, thereby making it possible to minimize noise and vibration generated from the apparatus.

5 The present invention can be used no matter as to whether two kinds of information requiring different rotational driving control methods, i.e., moving image information and information other than moving image information, are stored on the same disk or different disks.

10

(Embodiment 3)

15

Hereinafter, an information carrier (disk) according to Embodiment 3 of the present invention will be described. Figure 4 is a plan view showing the information carrier of Embodiment 3.

20

25

30

The information carrier recording carrier of the present invention includes a plurality of information recording areas (areas 1 and 2) separated along a radial direction of the information carrier as shown in Figure 4. Information is recorded in each of these information recording areas, depending on the information length of continuous information. Specifically, information having an information length of continuous information larger than a predetermined size, such as audio information and video information, is recorded in the area 1 in the inner circumference side of the information carrier, while information having an information length of continuous information smaller than the predetermined size, such as a short file (i.e., code information), is recorded in the area 2 in the outer circumference side of the information carrier. If an information length of information to be continuously reproduced has a length larger than the

predetermined size, the information is recorded in the area 1 in the inner circumference side even in the case of code information. The widths in a radial direction of areas 1 and 2 are appropriately adjusted, depending on the amount of informatin to be recorded in the respective areas.

The structure of the information carrier of Embodiment 3 has the following meaning.

10 A disk in which information is to be recorded (or has been record) with CLV control is subjected to CAV control, where the disk is rotated at a constant number of revolutions, so that as the track is closing to the outer circumference, the reproduction rate is increased. The upper limit of the reproduction rate is generally determined by a frequency characteristic of an optical pickup or a signal processing circuit and the maximum number of revolutions of a spindle motor. Therefore, when random access for code information is performed in an outer circumference and sequential access for audio/video information is performed in an inner circumference, handling or access performance and reading performace can be expected to be substantially improved.

25 In view of this, information is disposed in the information carrier of the present invention, depending on the size of continuous information as described above. Information on a disk can be efficiently reproduced using the information reproduction apparatuses described in Embodiments 1 and 2. Information having a large size of continuous information, such as audio or video data, can be reproduced with CLV control having a required reproduction rate (or CAV control having a limited number of revolutions as described in Embodiment 2), while

information having a small size of continuous information, such as code information, can be reproduced with CAV control while performing fast random access.

5 When information is recorded in the information carrier of Embodiment 3, a SIB (Size Information Block) area 50 may be effectively provided at a most inner circumference of a disk so as to further easily switch between CLV/CAV control. Figure 5 shows a format of
10 information on an information recording area, with which information is recorded depending on the size of information (continuous information) to be continuously reproduced, that is recorded in the SIB (Size Information Block) area 50.

15 As shown in Figure 5, the SIB area includes a portion 51 for storing a value of the total number of areas in a disk, a portion 52 for storing the leading address of the area 1, a portion 53 for storing the minimum size of a file recorded in the area 1, i.e., the threshold values
20 of the areas 1 and 2, a portion 54 for storing the leading address of the area 2, and a portion 55 for storing the minimum size of a file recorded in the area 2, i.e., the minimum size of continuous information to be continuously reproduced. When this SIB information is read out and
25 stored upon activation of an apparatus, the switching between the areas 1 and 2, i.e., between CAV control and CLV control (or CAV control of Embodiment 2 which limits the number of revolutions) can be even more easily performed.

30 Although, in Embodiment 3, it is described that two areas (the areas 1 and 2) are provided for recording information to be reproduced, three or more areas may be provided for recording information, depending on types or

sizes of files. In this case, the total number of areas is stored in the area 51, and the leading address, the minimum size, etc., of an area 3 are stored in an extended area.

5 Hereinafter, a specific embodiment in which information is recorded using the information carrier of Figure 4 and is further reproduced will be described.

[Example 1]

10 A description will be given of a first example, in which it is assumed that music information having a total size of 1 GB when it is continuously reproduced, such as a 3D-stereo recording Beethoven's "Choral", is recorded in the area 1, and a variety of text or code information of
15 1 MB or less including Beethoven's personal history, music scores, performers' profiles, and/or pictures is recorded in the area 2. The areas 1 and 2 range, for example, in radius from about 24 mm to 35 mm and from about 35 mm to 58 mm, respectively. Figure 6 shows a relationship
20 between the areas 1 and 2 as to the number of revolutions and the transfer rate (reproduction rate).

 When music is appreciated, the area 1 at the inner circumference side is accessed, CLV control is selected,
25 and information recorded in a track is sequentially read out. A light beam is moved toward the outer circumference along a spiral track while reading out information with the lapse of time. The rotation of the spindle motor 2 (Figure 1) is linearly decreased so as to maintain a constant
30 linear velocity. The number of revolutions is equal to A (rpm) at the leading radius of 24 mm of the area 1 and is reduced up to B (rpm) at the end radius of 35 mm. In this case, the transfer rate is controlled by CLV control in such

5 a manner as to be a constant value (aMB/s). Further, the rotation of the spindle motor may be further decreased up to a minimum reproduction rate (required for processing during sound reproduction without a problem) by performing the CLV control, thereby making it possible to reduce the rotation noise of the spindle.

10 Data relating to music other than the music per se is recorded in the area 2. The required data is randomly accessed by a host application. A host recognizes the leading address of the area 2 according to the SIB information. Therefore, when starting access to the area 2, the host switches the CLV control to CAV control for the spindle motor so that the number of revolutions is constant
15 (A rpm). A light beam is moved within the area 2 as required while reading out data recorded therein. In this case, as the track is closing to the outer circumference, the transfer rate (reproduction rate) is increased, and the response time of the spindle motor is zero due to CAV control, whereby
20 considerably fast access can be achieved in the area 2.

[Second Example]

25 A description will be given of a second example, in which it is assumed that information having a large size and requiring a fast read rate, such as high-quality image information, is recorded in the area 1, while a variety of information including a reduced image, a control program, or other code information are recorded in the area 2. The widths of the areas 1 and 2 are set to the same sizes as
30 those of Example 1.

As with the case where recorded information is audio information, information in the area 1 is reproduced with

CLV control while information in the area 2 is reproduced with CAV control. It should be noted that a read rate is important for image information unlike audio information, so that the linear velocity of CLV control in the area 1 is set to as high a value as possible while taking into consideration a frequency characteristic of an optical pickup or a signal processing circuit and the maximum number of revolutions of a spindle motor. A relationship between the areas 1 and 2 as to the number of revolutions and the transfer rate (reproduction rate) is shown in Figure 7.

In the area 1 in which sequential reading is predominant, the number of accesses is small, so that reading performance is paramount and the spindle motor 2 is therefore controlled in such a manner that reading is performed with CLV control and at a fast and constant transfer rate (AMB/s). In the area 2 in which random access is predominant, access performance is paramount and therefore the number of revolutions of the spindle motor 2 is set to be constant (C rpm) with CAV control so that fast access can be achieved.

Thus, information to be continuously reproduced (continuous information), i.e., a file having a large size is recorded in an area at the inner circumference side of the disk, while continuous information to be randomly reproduced, i.e., a file having a small size is recorded in an area at the outer circumference side. Therefore, information on a single disk can be effectively reproduced in terms of an access speed, noise and a read rate.

(Embodiment 4)

Next, an information recording apparatus for recording information onto the disk (Figure 4) of

Embodiment 3 and a method used therein will be described as Embodiment 4 of the present invention. Figure 8 is a block diagram showing a configuration of the information recording apparatus of Embodiment 4. Parts similar to those of the information reproduction apparatus of Embodiment 1 are indicated by the same numerals and a description thereof is thus omitted.

Information recorded in the host PC 15 (recorded information) is transferred to an encoder 23. The recorded information is subjected to scrambling and modulation, and the resultant information is modulated into a signal indicating the intensity of laser light by a LD (Laser Diode) modulation circuit 21. The signal is transferred via a LD (Laser Diode) drive circuit 20 to the optical pickup 3 (also serves as a recording section). Marks are recorded in a track on the disk 1 by modulating laser light having recording power which is about 10 times as strong as reproducing power. In this case, the host PC 15 transmits to a system controller 14 an information length signal indicating the continuity of information to be recorded. In accordance with the information length signal, the system controller 14 transmits an instruction to the control circuit 8, so that an area to be recorded and a track in the area are selected.

For example, when music information having a large size of continuous information is recorded, a light beam is shifted by a traverse motor 4 to the area 1 at the inner circumference side of the disk. The continuous music information is recorded in an appropriate empty track of the area 1. When code information having a small size of continuous information is recorded, a light beam is shifted

by the traverse motor 4 to the area 2 at the outer circumference side. The continuous code information is recorded in an appropriate empty track of the area 2. Therefore, a large size of information to be continuously reproduced is recorded in the area 1 at the inner circumference side, while a small size of information to be continuously reproduced is recorded in the area 2 in the outer circumference side. Whether the size of continuous information is large or small can be determined using about 1 GB as a criterion, for example.

In Embodiment 4, for recording, the spindle motor 2 is preferably controlled in such a manner as to record information to be continuously recorded or reproduced, such as audio information, with CLV control and information to be randomly reproduced, such as code data, with CAV control. A control method used in recording may be stored in the form of bit information as additional information in a header portion. In this case, CAV control and CLV control can be switched based on such bits when reproduction is performed.

Further, when the response time of laser or recording compensation are taken into consideration, a modulation frequency needs to be increased as the track is closing to the outer circumference in the case where recording is performed with CAV control. It is difficult to achieve this when a recording density and a transfer rate are certain values. In this case, all recording is performed with CLV control, and only reproduction is performed with CAV control and CLV control which are switched therebetween depending on information.

INDUSTRIAL APPLICABILITY

As described above, according to the information reproduction apparatus of the present invention, CAV control and CLV control are switched between depending on properties of the information, such as the size or type of continuous information to be continuously reproduced. Therefore, information recorded on a single disk or different disks can be reproduced with appropriate rotational driving control depending on the properties, thereby making it possible to improve access performance. Since rotation is not increased more than necessary for the properties of the information, noise or vibration of the apparatus due to rotation of a spindle motor is reduced.

Further, according to the information carrier and the information recording apparatus of the present invention, data having a large size of continuous information to be continuously reproduced is recorded at the inner circumference side of a disk, while data having a small size of continuous information to be continuously reproduced is recorded at the outer circumference side of the disk. Therefore, an even higher level of access performance can be achieved in reproduction. According to the information carrier of the present invention, continuous information, such as music and video, is previously recorded in an inner circumference area of a disk as pit information in the form of pits and lands. Subsequently, information created by a user, or the like can be additionally recorded in an outer circumference area of a disk. The rotation of such a partial ROM disk can be easily controlled in reproduction/recording according to the present invention.

CLAIMS

1. An information reproduction apparatus comprising: a
rotating section for rotating a disk-like information
5 carrier on which a unit of continuous information capable
of being continuously read out is recorded; a CLV control
section for controlling the rotating section in such a manner
that the information carrier is rotated at a constant linear
10 velocity; a CAV control section for controlling the rotating
section in such a manner that the information carrier is
rotated at a constant angular velocity; a rotation control
selection section for selectively operating the CLV control
section or the CAV control section; and an information
15 determination section for detecting an information length
of the continuous information,

wherein the rotation control selection section is
constructed in such a manner as to selectively operate the
CLV control section or the CAV control section based on a
result of the detection of the information length of the
20 continuous information by the information determination
section.

2. An information reproduction apparatus according to
claim 1, wherein when first information having the
25 information length as detected by the information
determination section larger than a predetermined size is
reproduced, the CLV control section is operated, and when
second information having the information length as
detected by the information determination section smaller
30 than the predetermined size is reproduced, the CAV control
section is operated.

3. An information reproduction apparatus according to

claim 1, wherein when first information having the information length as detected by the information determination section larger than a predetermined size is reproduced, the CAV control section is controlled in such a manner that the information carrier is rotated at as low a number of revolutions as a level where a transfer rate required to reproduce information recorded in a most inner circumstance of the disk-like information carrier can be secured, and

when second information having the information length as detected by the information determination section smaller than the predetermined size is reproduced, the CAV control section is operated.

4. An information reproduction apparatus according to claim 1, wherein the continuous information includes a header portion recording a block size or a file size, and a data portion, and the information determination section is constructed in such a manner as to detect the information length based on a content of the header portion.

5. An information reproduction apparatus according to claim 2, wherein the information carrier has a first information recording area at an inner circumference side and a second information recording area at an outer circumference side both arranged in a radial direction, and the first information is recorded in the first information recording area and the second information is recorded in the second information recording area.

6. An information reproduction apparatus according to claim 1, further comprising: a focusing section for focusing a light beam to the information carrier; a focusing

control section for controlling the light beam focused by the focusing section into a predetermined focus state; a tracking control section for controlling the light beam focused by the focusing section in such a manner that the light beam correctly scans a track on the information carrier; and a reproduced signal processing section for reproducing a signal read out from the information carrier.

7. An information reproduction apparatus comprising: a rotating section for rotating a disk-like information carrier on which moving image information is recorded; a CLV control section for controlling the rotating section in such a manner that the information carrier is rotated at a constant linear velocity; a CAV control section for controlling the rotating section in such a manner that the information carrier is rotated at a constant angular velocity; a rotation control selection section for selectively operating the CLV control section or the CAV control section; a reproduced signal processing section for reading out the moving image information from the information carrier and processing the moving image information; and an information determination section for determining whether or not a type of information to be reproduced is moving image information,

wherein the rotation control selection section is constructed in such a manner as to selectively operate the CLV control section or the CAV control section based on a result of the determination by the information determination section of whether or not information to be reproduced is moving image information.

8. An information reproduction apparatus according to claim 7, wherein when the information determination section

determines that the type of information to be reproduced is moving image information, the CLV control section is operated.

5 9. An information reproduction apparatus according to
claim 7, wherein when the information determination section
determines that the type of information to be reproduced
is moving image information, the CAV control section is
10 controlled in such a manner that the information carrier
is rotated at as low a number of revolutions as a level where
a transfer rate required to reproduce information recorded
in a most inner circumstance can be secured.

15 10. An information reproduction apparatus according to
claim 7, wherein the information determination section is
constructed in such a manner that when it is detected that
an information length of information to be reproduced is
greater than or equal to about 1 GB, the information
20 determination section determines that the information to
be reproduced is moving image information.

25 11. An information reproduction apparatus according to
claim 7, wherein the information determination section is
constructed in such a manner that when a command specialized
in reading of moving image information is input, the
information determination section determines that the
information to be reproduced is moving image information.

30 12. An information reproduction apparatus according to
claim 7, wherein the information determination section is
constructed in such a manner that when it is verified that
a regional code is recorded in the information carrier, the
information determination section determines that the

information to be reproduced is moving image information.

5 13. An information reproduction apparatus according to claim 7, wherein the information determination section is constructed in such a manner that when it is verified that defect management information is not registered in the information carrier, the information determination section determines that the information to be reproduced is moving image information.

10 14. An information reproduction apparatus according to claim 7, wherein the information determination section is constructed in such a manner that when it is verified that an extension of information to be reproduced indicates a
15 MPEG or VOB file, the information determination section determines that the information to be reproduced is moving image information.

20 15. An information reproduction apparatus according to claim 7, wherein the information determination section is constructed in such a manner that when it is verified that information to be reproduced is restrained under a parental lock, the information determination section determines that
25 the information to be reproduced is moving image information.

30 16. An information reproduction apparatus according to claim 7, wherein the information determination section is constructed in such a manner that when it is verified that authentication has been conducted so as to protect copyright, the information determination section determines that the information to be reproduced is moving image information.

17. An information reproduction apparatus according to claim 1, further comprising: a focusing section for focusing a light beam to the information carrier; a focusing control section for controlling the light beam focused by the focusing section into a predetermined focus state; a tracking control section for controlling the light beam focused by the focusing section in such a manner that the light beam correctly scans a track on the information carrier; and a reproduced signal processing section for reproducing a signal read out from the information carrier.

18. An information carrier, wherein the information carrier is a disk-like information carrier having a plurality of information recording areas, the plurality of information recording areas are separated along a radial direction of the information carrier, and information is recorded in each of the plurality of information recording area depending on the information length of a unit of continuous information capable of being continuously read out.

19. An information carrier according to claim 18, wherein information having an information length of continuous information larger than a predetermined size is recorded in the information recording area at an inner circumference side of the information carrier, and information having an information length of continuous information smaller than the predetermined size is recorded in the information recording area at an outer circumference side of the information carrier.

20. An information carrier according to claim 18, wherein a specific area for recording the number of the plurality of information recording areas, positional information of

each information recording area, and a minimum size of continuous information recorded in each information recording area is further provided.

5 21. An information recording apparatus comprising a
recording section for recording information including a
unit of continuous information capable of being
continuously recorded into a disk-like information carrier
10 having a plurality of information recording areas separated
along a radial direction of the information carrier, wherein
the information recording apparatus further includes an
information determination section for detecting an
information length of the continuous information, and the
recording section is constructed in such a manner that the
15 continuous information is recorded into the corresponding
information recording area depending on the information
length detected by the information determination section.

22. An information recording apparatus according to
20 claim 21, wherein the recording section is controlled by
the information determination section in such a manner that
information having an information length of continuous
information larger than a predetermined size is recorded
in the information recording area at an inner circumference
25 side of the information carrier, and information having an
information length of continuous information smaller than
the predetermined size is recorded in the information
recording area at an outer circumference side of the
information carrier.

30 23. An information recording apparatus according to
claim 21, wherein the recording section is constructed in
such a manner that the number of the plurality of information

recording areas, positional information of each information recording area, and a minimum size of continuous information recorded in each information recording area are recorded in a specific area of the information carrier.

5

24. An information recording apparatus according to claim 21, further comprising: a rotating section for rotating the information carrier at a predetermined number of revolutions; a focusing section for bringing and focusing a light beam to the information carrier; a focusing control section for controlling the light beam focused by the focusing section into a predetermined focus state; and a tracking control section for controlling the light beam in such a manner that the light beam correctly scans a track on the information carrier.

10

15

ABSTRACT

An information reproduction apparatus of the present invention comprises a rotating section 2 for rotating an information carrier 1 on which a unit of continuous information capable of being continuously read out is recorded, a CLV control section 9 for controlling the rotating section in such a manner that the information carrier is rotated at a constant linear velocity, a CAV control section 9 for controlling the rotating section in such a manner that the information carrier is rotated at a constant angular velocity, a rotation control selection 14 for selectively operating the CLV or CAV control section, and an information determination section 14 for detecting an information length of the continuous information. The rotation control selection section is constructed in such a manner as to selectively operate the CLV or CAV control section based on a result of the detection of the information length of the continuous information.


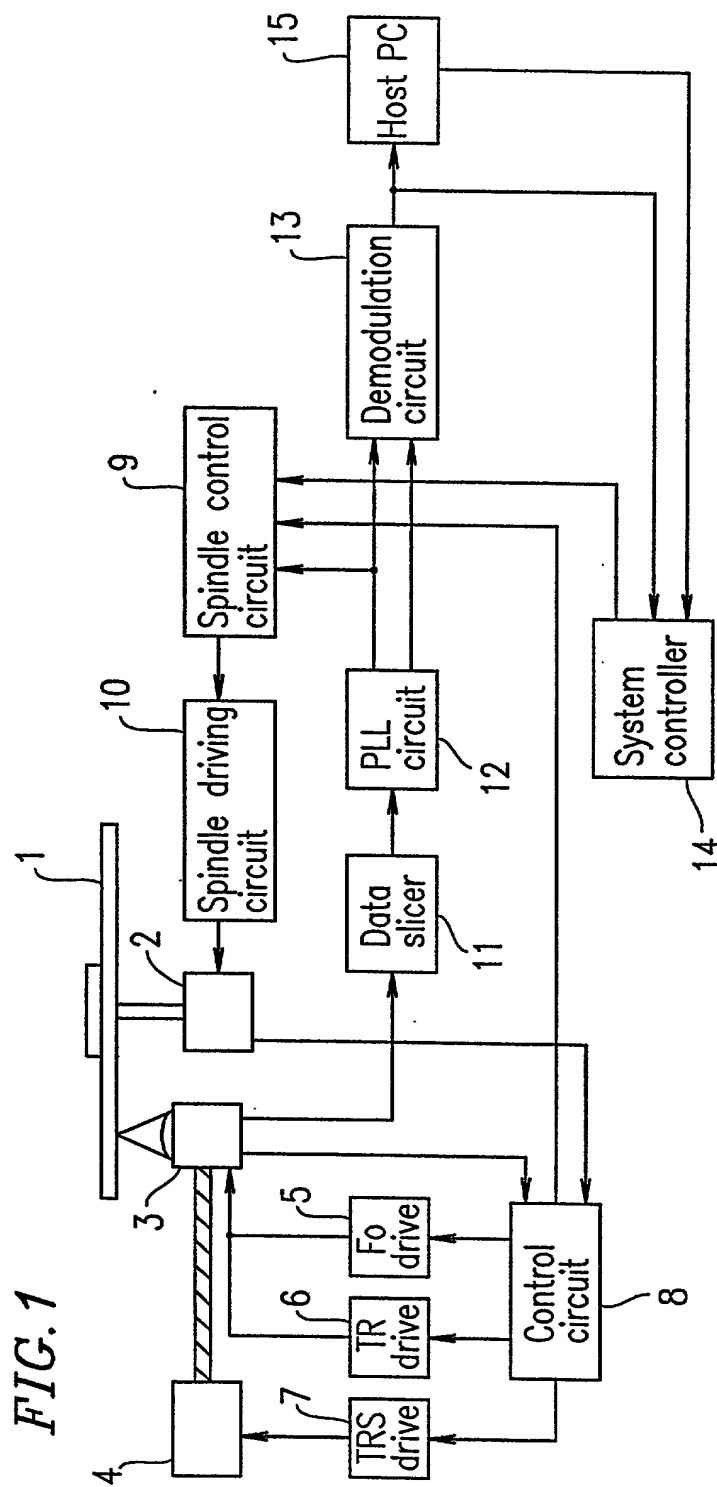


FIG. 2

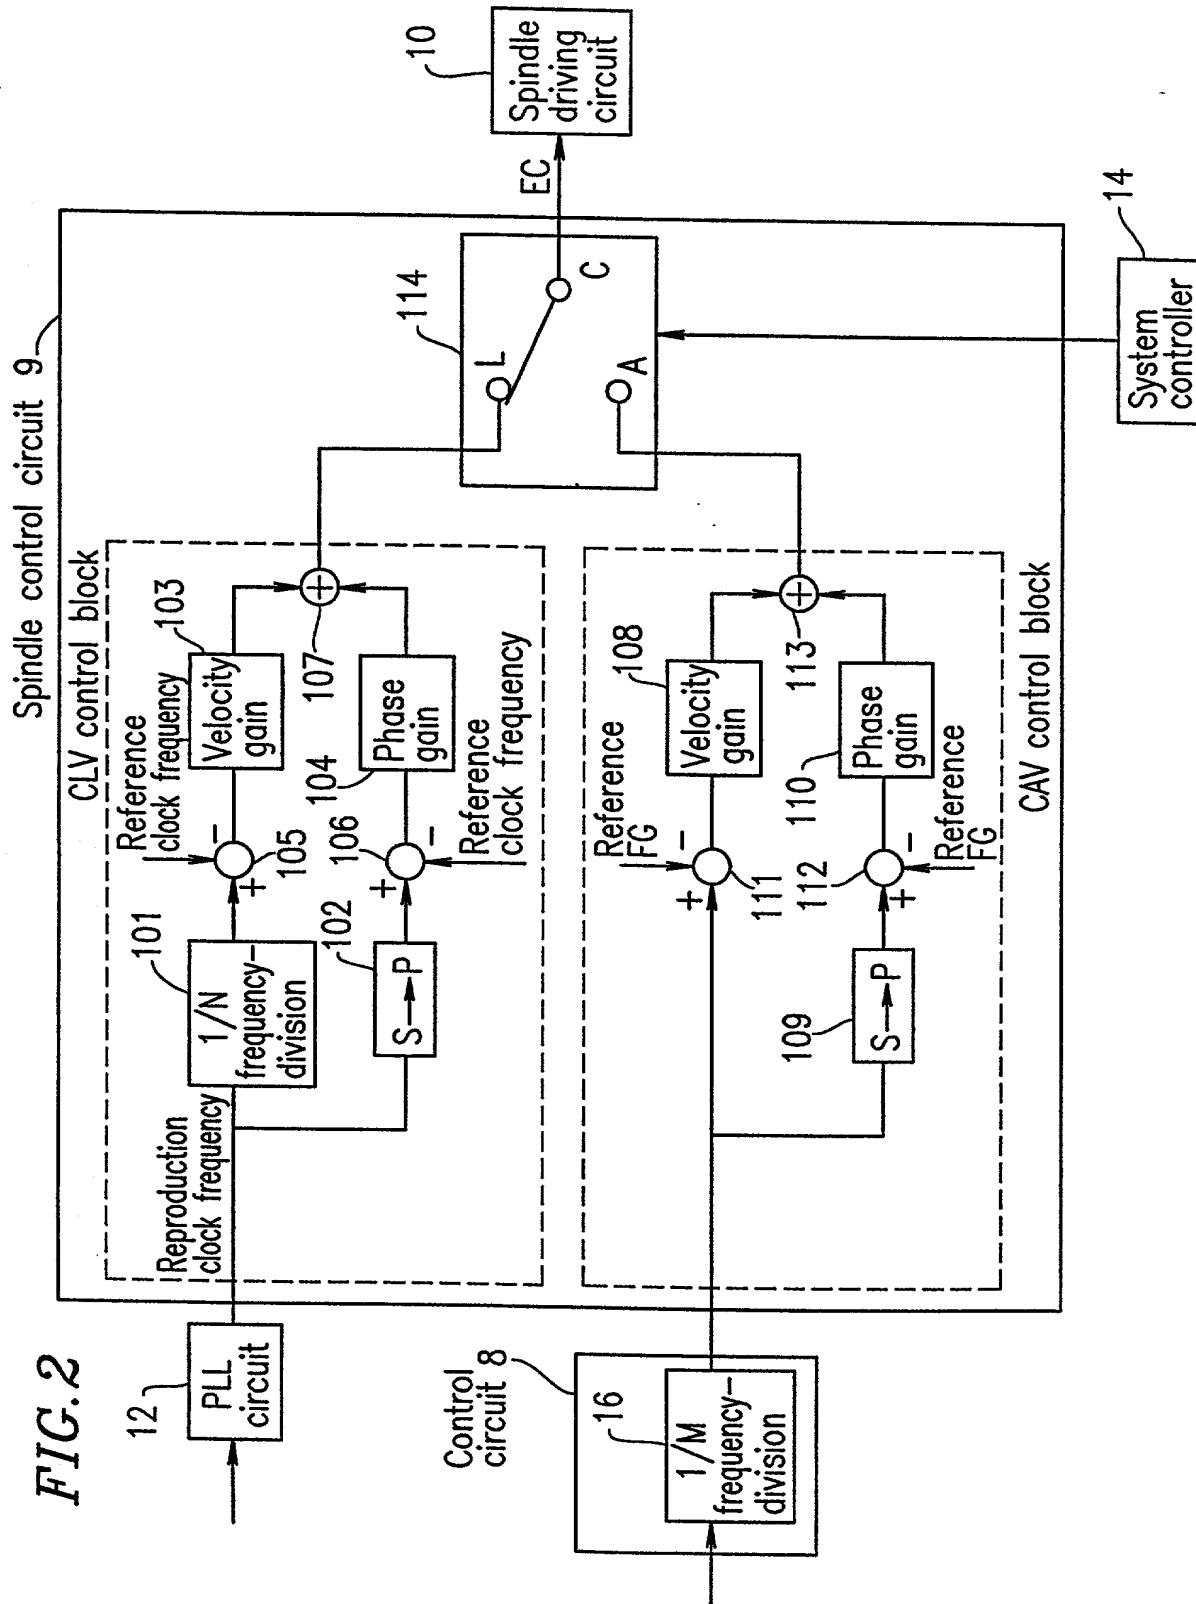

3/5






FIG. 3**FIG. 4****FIG. 5**


FIG. 6

The number of revolutions/
transfer rate (reproduction rate)

**FIG. 7**

The number of revolutions/
transfer rate (reproduction rate)

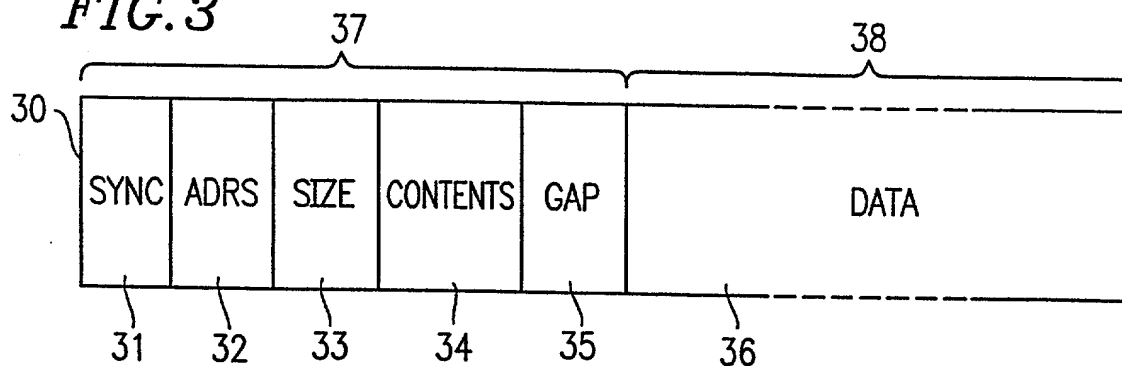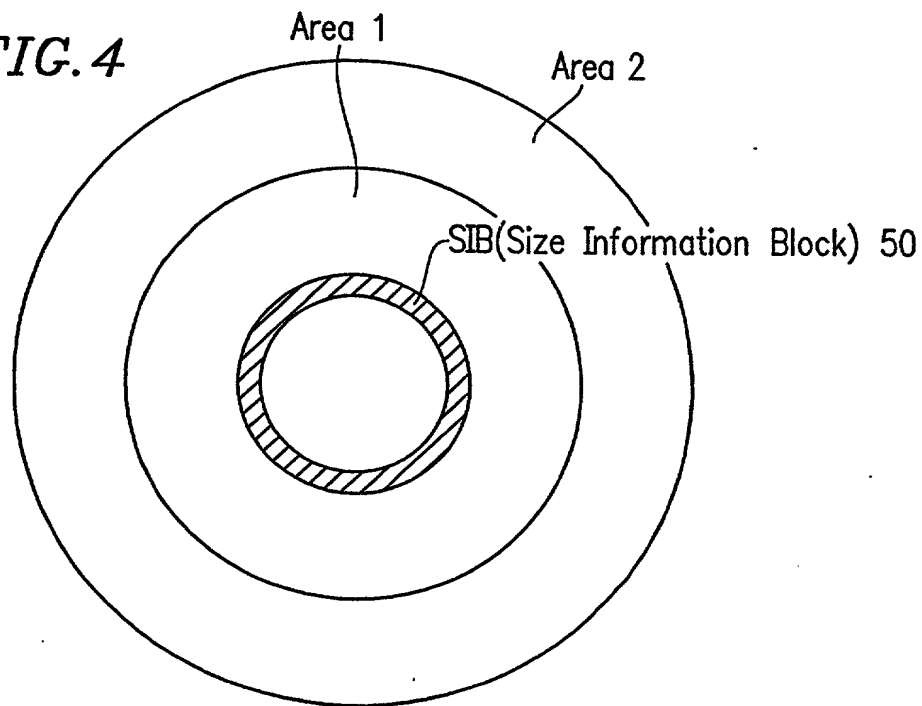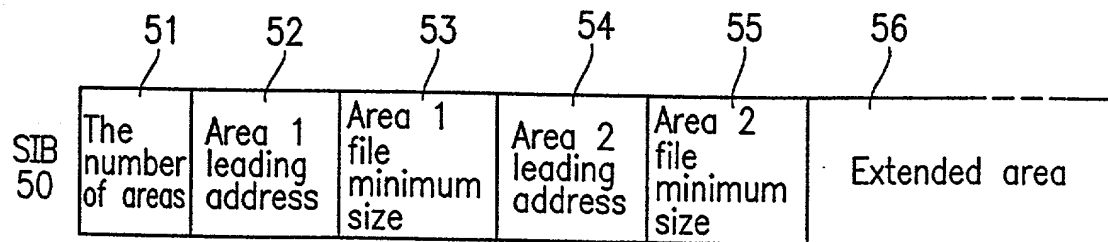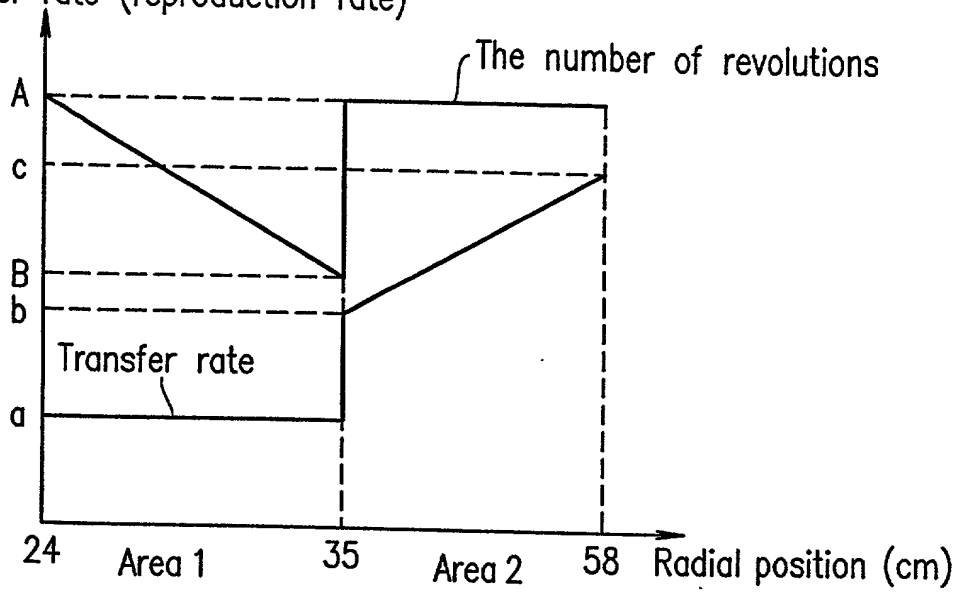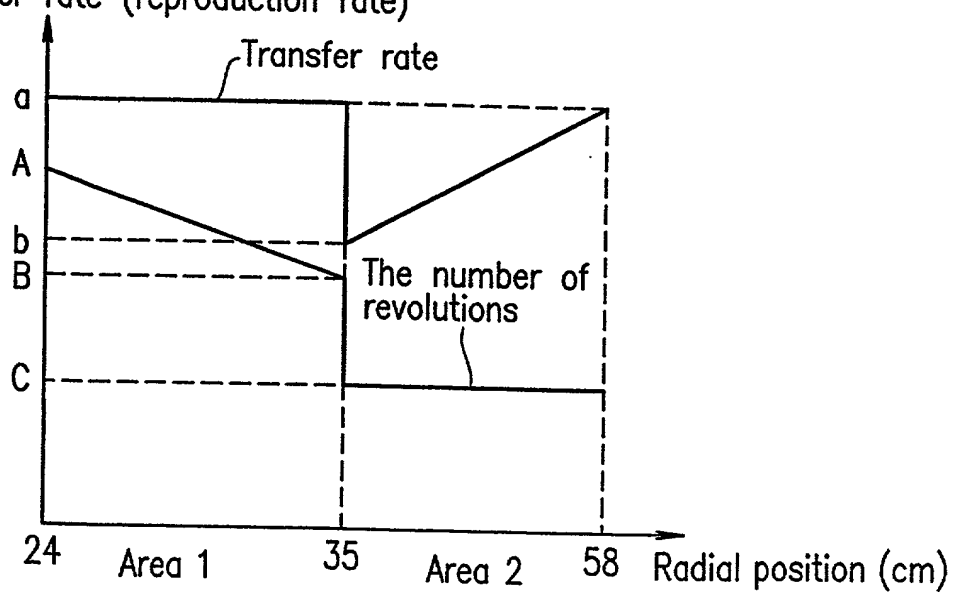

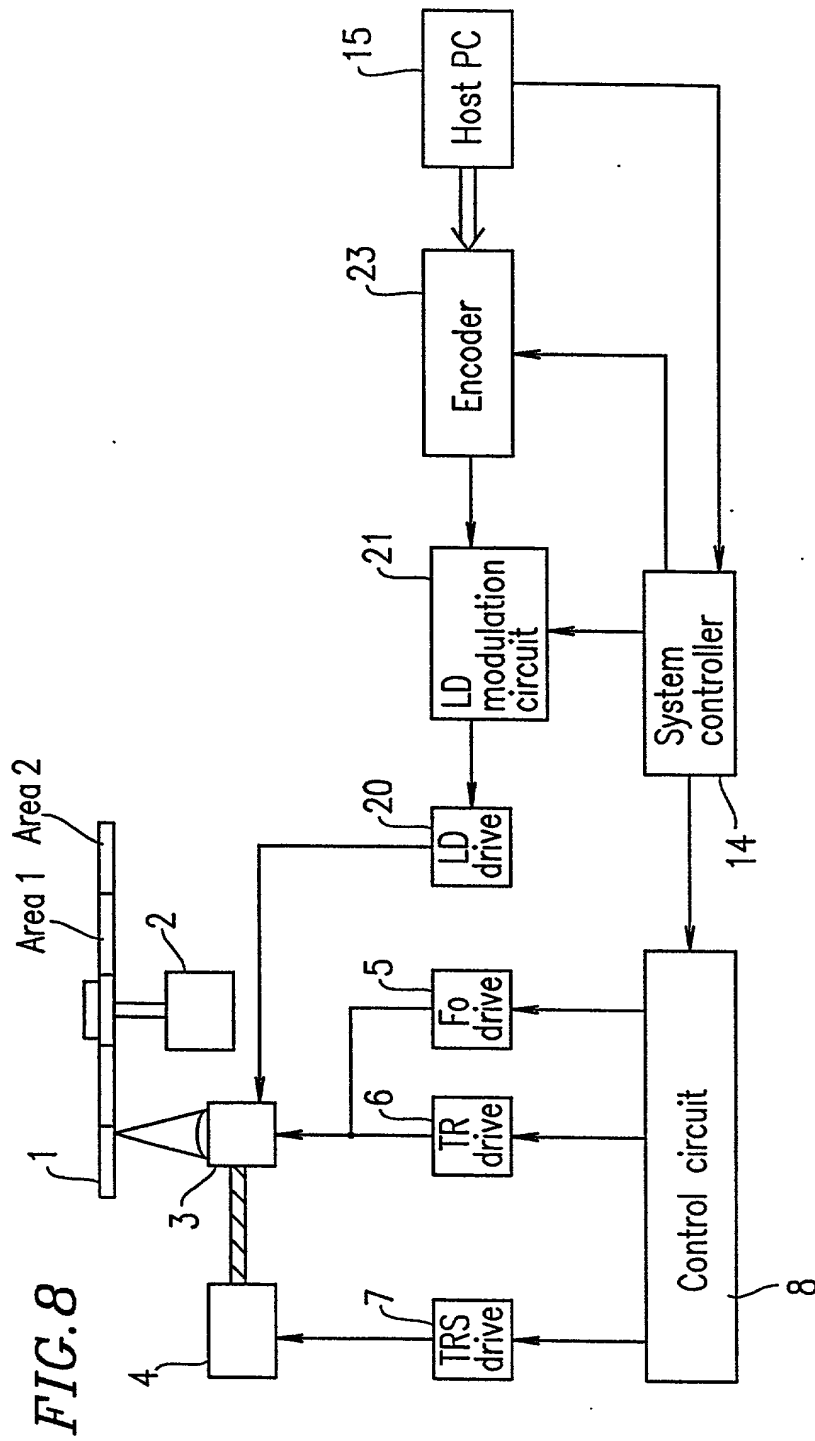

Attorney Docket No. _____

COMBINED DECLARATION AND POWER OF ATTORNEY
(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: **INFORMATION REPRODUCTION APPARATUS, INFORMATION CARRIER,
AND INFORMATION RECORDING APPARATUS**

the specification of which

- (a) ☐ is attached hereto.
 (b) ☐ was filed on _____ as Serial No. 0 / _____ or ☐ Express
 Mail No. _____ as Serial No. not yet known, and was amended on _____ (if applicable).
 (c) ☒ was described and claimed in PCT International Application No. PCT/JP00/03430 filed on
May 26, 2000 and amended under PCT Article 34 on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations §1.56(a).

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

- (d) ☐ no such application have been filed.
 (e) ☒ such applications have been filed as follows.

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
<u>Japan</u>	<u>11-147936</u>	<u>27/05/99</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Armand P. Boisselle, Reg. No. 22,381; Neil A. DuChes, Reg. No. 26,725; Mark D. Saralino, Reg. No. 34,243

3

follow instruction from

Name(s) of authorized representation(s) Shusaku Yamamoto Patent Law Office
Address Fifteenth Floor, Crystal Tower, 1-2-27 Shiromi, Chuo-Ku, Osaka 540, Japan

as to any actions to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney(s) and the undersigned. In the event of a change in the person(s) from whom instructions may be taken, the U.S. attorney(s) will be so notified by the undersigned.

Send Correspondence To

Direct Telephone Calls To:
(name and telephone number)

Neil A. DuChez
RENNER, OTTO, BOISSELLE & SKLAR, LLP
1621 Euclid Avenue, 19th Floor
Cleveland, Ohio 44115

Neil A. DuChez
(216) 621-1113

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued therein.

1-00 Full name of sole or first inventor Naohiro KIMURA
Inventor's signature Naohiro Kimura
Date November 2, 2001 Country of Citizenship Japan
Residence Kyoto 611-0021 Japan JP
Post Office Address 92, Niban, Uji, Uji-shi,
Kyoto 611-0021 Japan

2-00 Full name of second inventor, if any Katsuya WATANABE
Inventor's signature Katsuya Watanabe
Date November 2, 2001 Country of Citizenship Japan
Residence Nara 631-0033 Japan JP
Post Office Address 7-854-2, Ayameikeminami, Nara-shi,
Nara 631-0033 Japan

3-00 Full name of third inventor, if any Hiromichi ISHIBASHI
Inventor's signature Hiromichi Ishibashi
Date November 2, 2001 Country of Citizenship Japan
Residence Osaka 567-0876 Japan JP
Post Office Address 6-H-503, Tennou 2-chome, Ibaraki-shi,
Osaka 567-0876 Japan

**CHECK FOR ANY OF THE FOLLOWING ADDED PAGE(S) WHICH
FORM A PART OF THIS DECLARATION**

- ☐ Signature for fourth and subsequent joint inventors. Number of pages added ____.
- ☐ Added page to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application.
- ☒ This declaration ends with this page.